AIR HR 60

SINGLE ROOM ENERGY RECOVERY VENTILATOR



with renewable energy!







HIGH HEAT
RECOVERY EFFICIENCY
OF UP TO 97%



CO₂ SENSOR



WIFI













READY



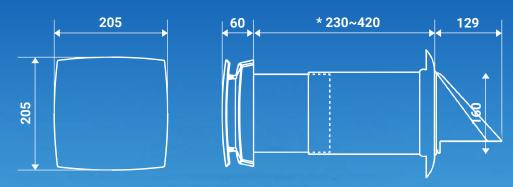

* Size is customized, the length of 600 mm is optional with extension tube.

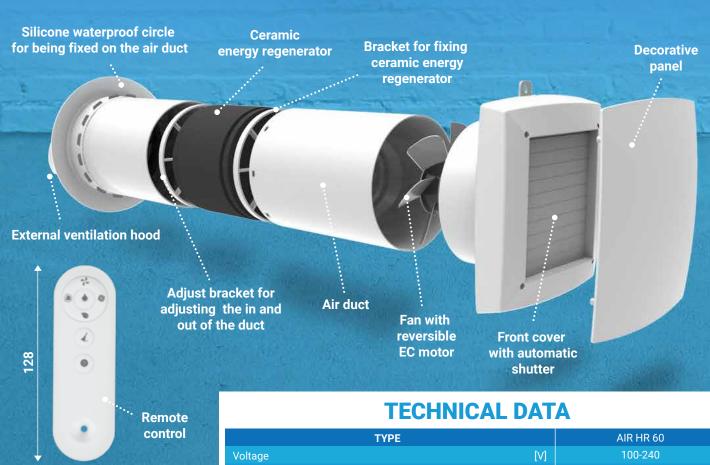



HAJDU Hajdúsági Ipari Zrt.

38,5

4243 Téglás, külterület 0135/9. hrsz. phone: (52) 582-700 email: hajdu@hajdurt.hu web: www.hajdurt.hu

Pictures in this brochure are for illustration only.

ТҮРЕ		AIR HR 60		
Voltage	[V]	100-240		
Frequency	[Hz]	50/60		
Inlet power	[W]	6	7	7,8
Current	[A]	0,04	0,05	0,06
RPM		1000	1500	1800
RPM (max.)		2200		
Air flow in supply/exhaust mode with F7 filter *	[m³/h]	20	40	50
Air flow in regeneration mode with F7 filter *	[m³/h]	10	20	25
Air flow in supply/exhaust mode with F7 filter *	[CFM]	11,8	23,5	29,4
Air flow in regeneration mode with F7 filter *	[CFM]	5,9	11,8	15
Max. air flow (fan in turbo mode)	[m³/h]	60		
Max. air flow (fan in turbo mode)	[CFM]	35		
Sound pressure	[dB(A)]	32,7		
Installation method		wall breach		
Regeneration Efficiency	[%]	Up to 97		
Ingress Protection Rating		IPX4		
Diameter of duct	[mm]	158		
SEC		class A		
Type of installation		Wall mounting		
Net Weight	[kg]	4,2		

^{*} Air flow in supply/exhaust mode without F7 filter is 34/56/70 CMH or 20/33/41, 2 CFM, and the relative parameters are modified accordingly.